


### PRODUCT DESCRIPTION & USE

**Jacobi Bondol** provides an excellent key to consolidate and bind friable or porous masonry surfaces prior to decoration. The problems of toxicity, smell and flammability of solvent based resin solutions is eliminated by the use this water based low VOC product. The dispersion gives excellent penetration, binding and sealing

### KEY BENEFITS

- A high quality, water-based low odour low VOC
- Excellent penetration binds powdery surfaces
- Provides a sound surface for subsequent coats

### AVAILABLE IN SIZES

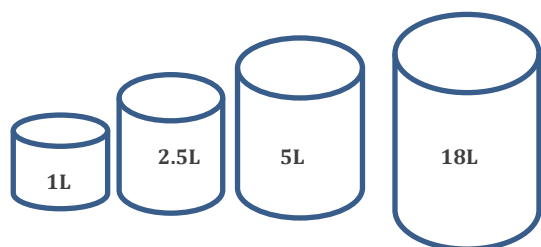

### COLOUR RANGE

#### Jacobi Bondol

Available in clear solution only.

### VOC CONTENT

Contains max VOC; 4g/l  
Conforms to EU 2010 Directive (Cat A/c) 40g/l

### COMPOSITION (NOMINAL)

**Binder:** Acrylic Modified Copolymer Emulsion.  
**Solvent:** Water.

### SOLIDS - SPECIFIC GRAVITY

**Volume Solids** 16.0 % (+/- 2%)  
**Weight Solids** 17.0 % (+/- 2%)  
**Specific Gravity** 1.00 g/l (+/- 0.15)

### SURFACE PREPARATION

Surfaces to be coated must be clean, dry and free from all defective or poorly adhering material, dirt, grease and salts. New plaster and masonry must be fully dry before priming. Use in accordance with good painting practices

### APPLICATION



Brush, roller, spray & airless spray.  
As with other water-based paints, do not apply in temperatures below 5°C

### SPREADING RATE



As a guide a coverage rate of between 10 - 20m<sup>2</sup>/litres can be achieved under normal conditions

### SPRAY RECOMMENDATIONS

**Conventional Spray:** Satisfactory through most equipment.  
**Airless Spray:** A typical recommendation for airless spray application is a minimum working pressure on paint of 140 kg/cm<sup>2</sup> (2000 lb/in<sup>2</sup>) with a spray tip size of 0.38mm to 0.46mm (15 - 18thou) spray tip angle 65°. Filter mesh 60

### DRYING TIMES (SINGLE COAT, STANDARD THICKNESS)



**Touch Dry:** 2 hours  
**Recoat:** 2 - 4 hours

This is dependent upon temperature and humidity. Darker colours may take longer

### CLEANING UP



Clean up with soap and water. After cleaning up be sure to flush spray equipment with solvent to prevent rusting following manufacturer's instructions. Dispose of can in accordance with local authority guidelines.

### PRECAUTIONS

Keep out of reach of children. Ensure good ventilation during application and drying. If the product comes in contact with the eyes rinse immediately with plenty of water. To remove splashes from skin use soap and water or a recognised skin cleaner. Do not take internally. **Contains no added lead.**

### PREVIOUSLY PAINTED SURFACES

If in sound condition, clean the surface of all foreign material. If paint is peeling or badly weathered, clean to sound substrate and treat as new.

### FOLLOW US ON

Online: [www.fleetwood.ie](http://www.fleetwood.ie)  
Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)  
Phone: 049 8547209

