


PRODUCT DESCRIPTION & USE

Fleetwood Trade Terminator is a premium shellac-based primer, sealer and stain killer. It is perfect for use on interior surfaces and spot priming exterior substrates. This high adhesion shellac seals porous surfaces giving great enamel holdout. It also seals bleeding knots, water stains, marker pen stains, nicotine, oil stains, and more.

KEY BENEFITS

- Dries exceptionally fast recoat in 45 minutes
- Excellent opacity blocks persistent stains
- Designed to permanently block odours from smoke and fire damage
- Superior adhesion to glossy surfaces without the need for sanding

AVAILABLE IN SIZES

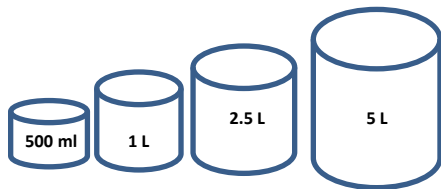

COLOUR RANGE

Fleetwood Trade Terminator

White

VOC CONTENT

Contains max VOC; 489g/l
Conforms to EU 2010 Directive (Cat A/i) 500g/l

COMPOSITION (NOMINAL)

Pigment: Lightfast Pigments.
Binder: Shellac
Solvent: Methylated spirits

SOLIDS - SPECIFIC GRAVITY

Volume Solids 24% (+/- 2%)
Weight Solids 31% (+/- 2%)
Specific Gravity 1.34g/l (+/- 0.02)

SURFACE PREPARATION

All surfaces must be clean, dry and free from all defective or poorly adhering material. Thoroughly rub down previously painted surfaces, using 'wet' 'flattening' methods where possible, wipe off with a damp, lint free cloth. **Note:** Special precautions should be taken during surface preparation of pre-1960s paint surfaces over wood and metal as they may contain lead (Pb). Use in accordance with good painting practices

APPLICATION



This product may be spray applied but for H&S reasons related to all solvent-based paints, spray application is **not** recommended. As with other solvent-based paints, do not apply in temperatures below 5°C (as recommended by British Standard BS 6150).

SPREADING RATE



As a guide a coverage rate of up to 12m²/per litre can be achieved under normal conditions

TRANSPORTATION & STORAGE

Do not use or store in extremes of temperature and protect from frost. To prevent spillage, please store and transport upright.

SPRAY RECOMMENDATIONS

Conventional Spray: Satisfactory through most equipment.

Airless Spray: A typical recommendation for airless spray application is a minimum working pressure on paint of 85 kg/cm² (1200 lb/sq in) with a spray tip size of 0.28mm to 0.33mm (11 - 13thou) spray tip angle 65°. Filter mesh 60

DRYING TIMES (SINGLE COAT, STANDARD THICKNESS)



Touch Dry: 20 minutes

Recoat: 45 mins

Hard Dry - 1 day

This is dependent upon temperature and humidity. Darker colors may take longer.
26°C to 50% RH @ 4 Thou wet

CLEANING UP



Remove as much product as possible from application equipment before cleaning. Replace lid firmly. Clean equipment immediately after use with methylated spirits. Dispose of cans and waste paint in accordance with local authority guidelines

TINTING INSTRUCTIONS

Tint only with Fleetwood tinting systems: **Only available in pastel shades maximum shots allowable 25 in 1 litre**

PRECAUTIONS

Keep out of reach of children. Ensure good ventilation during application and drying. Extremely flammable keep away from heat, sparks and hot surfaces ensure container is tightly closed when not using. - No smoking. If the product comes in contact with the eyes rinse immediately with plenty of water. To remove splashes from skin use soap and water or a recognised skin cleaner. Do not take internally. **Contains no added lead.**

PREVIOUSLY PAINTED SURFACES

If in sound condition, clean the surface of all foreign material. Glossy surfaces must be rubbed down to provide a key. If paint is peeling or badly weathered, clean to sound substrate and treat as new.

FOLLOW US ON

Online: www.fleetwood.ie

Email: info@fleetwood.ie

Phone: 049 8547209

