


PRODUCT DESCRIPTION & USE

Fleetwood Trade Pure Grip is a high quality interior / exterior all-purpose primer sealer and undercoat. Primes and seals a multitude of substrates including plaster, plasterboard, wood panelling, ceramic and glazed tiles, doors, trim and any surface where great adhesion, fast drying, stain blocking properties are needed

KEY BENEFITS

- Primes difficult substrates
- Fast drying with great adhesion
- Low odour and VOC
- Seals porous surfaces and blocks stains

AVAILABLE IN SIZES

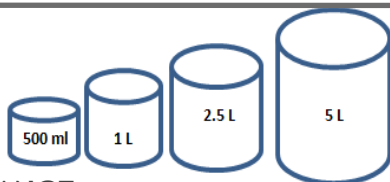

COLOUR RANGE

Fleetwood Trade Pure Grip

Available in various colours from the Colour Answers Tinting system.

VOC CONTENT

Contains max VOC; 14g/l
Conforms to EU 2010 Directive (Cat A/d) 130g/l

COMPOSITION (NOMINAL)

Pigment: Lightfast Pigments.
Binder: Hybrid of acrylic and alkyd emulsions
Solvent: Water.

SOLIDS - SPECIFIC GRAVITY

Volume Solids 34.0 % (+/- 2%)
Weight Solids 49.0 % (+/- 2%)
Specific Gravity 1.29 g/l (+/- 0.2)

SURFACE PREPARATION

Surfaces to be painted must be in sound condition. Use in accordance with good painting practice. Remove oil, grease and flaking material. When priming over stained areas, first attempt to remove as much of the stain as possible by washing, sanding, scraping, etc. Remove mould and treat area with Fleetwood Fungicidal Wash. Avoid dust inhalation

APPLICATION



For best results, apply by brush as this assists the primer to penetrate the surface. Alternatively Pure Grip can be applied by airless spray. Allow fresh plaster to dry thoroughly before application. Temperature (air, surface, material) (at least 4°C above dew point) 10°C to 42°C. Relative Humidity 75% maximum.

SPREADING RATE



As a guide a coverage rate of up to 10m²/litre can be achieved on non-porous surfaces under normal conditions.

REDUCTION

Reduce by up to 20% as required by application and or equipment. Porous surfaces should be sealed with Fleetwood Masonry Primer or alternatively thin Pure Grip by 20% with water as a first coat.

SPRAY RECOMMENDATIONS

Airless Spray: A typical recommendation for airless spray application is a minimum working pressure on paint of 140 kg/cm² (2000 lbs/in²) with a spray tip size of 0.38mm to 0.46mm (15 - 18thou) spray tip angle 65°. Filter mesh 60

DRYING TIMES (SINGLE COAT, STANDARD THICKNESS)



Touch Dry: 30 Mins
Recoat: 1 – 2 hours
This is dependent upon temperature and humidity. Darker colours may take longer. 26°C to 50% RH @ 4 Thou wet.

CLEANING UP



Clean up with soap and water. After cleaning up be sure to flush spray equipment with solvent to prevent rusting following manufacturer's instructions. Dispose of can in accordance with local authority guidelines.

TINTING INSTRUCTIONS

Tint only with Fleetwood tinting systems: **Only available in pastel shades**

PRECAUTIONS

Keep out of reach of children. Ensure good ventilation during application and drying. If the product comes in contact with the eyes rinse immediately with plenty of water. To remove splashes from skin use soap and water or a recognised skin cleaner. Do not take internally. **Contains no added lead.**

PREVIOUSLY PAINTED SURFACES

All surfaces to be painted should be clean, dry and free from loose and flaking material. Glossy surfaces must be rubbed down to provide a key. Stir well before use. Avoid overspreading. For best results use a good quality synthetic brush. If using a roller lay off to avoid pin-holing.

FOLLOW US ON

Online: www.fleetwood.ie
Email: info@fleetwood.ie
Phone: 049 8547209

