

Prestige Air-Purifying Scrubbable Matt

Expertly engineered to the highest standards, Prestige Air-Purifying Scrubbable Matt is an ultra-durable, dead flat finish that actively cleans the air long after application – combining lasting performance with elegant style



PRODUCT DESCRIPTION

Prestige Air-Purifying Scrubbable Matt is the next generation of interior paint, offering a perfect blend of performance, innovation, and style. With exceptional coverage and effortless application, it delivers a flawless dead flat finish that enhances any space. Engineered with cutting-edge air-purifying technology, this paint actively helps to improve indoor air quality by absorbing and neutralising common airborne pollutants such as formaldehyde – often found in furniture, flooring, and household materials. Its ultra-durable, scuff- and stain-resistant formula ensures walls stay looking fresher for longer, even in high-traffic areas. Prestige Air-Purifying is more than just paint – it's a cleaner, healthier choice for modern living.

USES

- Suitable for a wide range of spaces, including commercial environments such as office fit-outs, hotels, and retail stores
- Perfect for living rooms, bedrooms, and high-traffic areas like hallways and staircases
- An excellent choice for children's rooms and nurseries, offering both durability and cleaner air
- Ideal for educational settings such as schools, as well as healthcare and residential care facilities where hygiene and clean air are essential.

CHARACTERISTICS / ADVANTAGES

- Excellent durability
- Quick drying
- Low VOC - Indoor Air Comfort Gold accredited
- LEED & BREEAM compliant
- Air purifying technology
- Easy application by spray
- Excellent coverage and opacity
- Dead flat matt finish
- Class 1 scrub resistance - EN 13 300

APPROVALS / STANDARDS

VOC Content

- 2004/42/EC EU limit value for this product (cat.A/a WB): 30g/l (2010) This product contains max. 1g/l VOC.

LEED


- The requirements of LEED v4 and LEED v4.1 BETA (February 2021): EU Decopaint Directive 2004/42/CE for interior matt walls and ceilings having a VOC content below 30 g/L.
- AgBB (28 Days Emissions)

Quality Control

- Manufactured under the auspices of ISO 9001:2015 quality & ISO 14001:2015 environmental management systems.

Indoor Air Quality

- This product has been tested under the regulations outlined in French Indoor Air Quality Decree No 2011-321 – Arrêté April 2011 and was awarded an A+.



Need help? Speak to the experts

Our dedicated team are here to help. If you have any queries on this product, or any product in the Fleetwood range, queries about preparation or application, or can't find your required colour, call us today

Technical Assistance: Email: technical@fleetwood.ie Tel: +353 49 854 7209 (weekdays 9am-5pm)
Colour Advice: Tel: +353 49 854 7209 (weekdays 9am-5pm Saturdays 8am - 4.30pm)



Colour

Colours Brilliant White & Tinted To Full Range of Fleetwood Colours Including Prestige Collection

Colour Collections Fleetwood Colour Perfect, NCS, Sherwin Williams, Pantone, BS British Standard, & RAL



Specification

Composition	Water-based acrylic.
Number of Components	1
Recommended number of coats	2 coats are recommended. Coverage may vary depending on the profile, porosity of the substrate and application method.
Usage Interior/Exterior	Interior.
Application Tools	Brush, roller or spray.
Coverage	Approx. 12m ² per litre, per coat.
Overcoat Times	Recoat after 4 hours.
Curing Time	Touch dry in 2 hours, fully cured after 7 to 10 days.
Suitable For	New or previously painted drywall, plaster, cement, concrete and other paintable surfaces.
Min. application temperature	4°C
Pack Size	1L, 2.5L, 5L, 10L
Shelf Life	3 years in unopened container.
Storage	Do not allow to freeze.
Cleaning Tools	Wash application tools in warm, soapy water immediately after use. .
Principle Limitations Please contact us regarding applications not described here	Not intended for application to floors or any surface subject to water immersion or prolonged contact with water including shower enclosures, saunas, steam rooms. Not recommended for use in HVAC duct work.


Product Information

Colour Range:	Brilliant White
LRV Range:	92
VOC Content:	Contains max VOC; 1 g/l Conforms to EU 2010 Directive (Cat A/a) 30g/l
Composition:	Pigment: Lightfast Pigments Binder: Acrylic Modified Copolymer Emulsion. Solvent: Water
Solids:	Volume Solids (P Base) 39.5% (+/- 2%) Weight Solids 59.6% (+/- 2%) Specific Gravity 1.49 g/l (+/- 0.15) Gloss < 6.0 @ 85° & < 2.0 @ 60° pH -Value > 8.2

Product Information Cont.

Surface Preparation:	Surfaces to be painted must be in sound condition. Use in accordance with good painting practice. Remove oil, grease and flaking material. Treat powdery surfaces with Fleetwood Masonry Primer. Surfaces to be painted must be sound, clean, dry and free from all defective or poorly adhering material, dirt, grease and salts. New plaster and masonry must be fully dry before priming. Avoid the inhalation of dust. Wear a suitable face mask if dry sanding. Special precautions should be take
Application:	Brush, roller, spray & airless spray. As with other water-based paints, do not apply in temperatures below 5°C
Spreading Rate:	As a guide, a coverage rate of up to 12m ² per litre, per coat. can be achieved under normal conditions
Reduction:	Reduce by up to 20% as required by application and or equipment. When applying over previously painted matt surfaces, it is good practice to apply the 1st coat at 105 dilutions.
Spray Recommendations:	Conventional Spray: Satisfactory through most equipment. Airless Spray: A typical recommendation for airless spray application is a minimum working pressure on paint of 140 kg/cm ² (2000 lb/in ²) with a spray tip size of 0.38mm to 0.46mm (15 - 18thou) spray tip angle 65°. Filter mesh 60
Drying Time:	Touch Dry: 2 hours Recoat: 2 – 4 hours This is dependent upon temperature and humidity. Darker colours may take longer 26°C to 50% RH @ 100 µm
Cleaning Up:	Clean up with soap and water. After cleaning up be sure to flush spray equipment with solvent to prevent rusting following
Tint Instructions:	Tint only with Fleetwood Tinting systems
Previously Painted Surfaces:	Keep out of reach of children. Ensure good ventilation during application and drying. If the product comes in contact with the eyes rinse immediately with plenty of water. To remove splashes from skin, use soap and water or a recognised skin cleaner. Do not take internally. Contains no added lead.
Precautions:	If in sound condition, clean the surface of all foreign material. Glossy surfaces must be rubbed down to provide a key. If paint is peeling or badly weathered, clean to sound substrate and treat as new. Do not use or store in extremes of temperature and protect from frost. To prevent spillage, please store and transport all containers in upright position. Select sensible working clothes that cover as much of the body as possible. Always wear gloves and use eye protection. Do not touch your mouth or eyes with your gloves.

Diagram of Formaldehyde Removal:

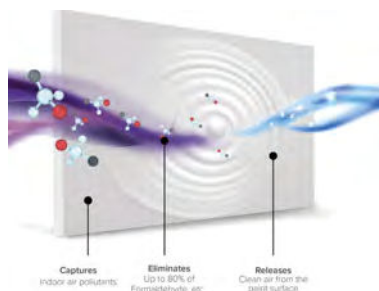

Limitations:

The above information is not intended to be exhaustive or complete. The information is based on laboratory tests and practical experience, and it is given to the best of our knowledge. As manufacturer we cannot control the conditions under which the product is being used or the many factors that have an effect on the use and application of the product. We do not hold guarantee for any damages caused by using the product against our instructions or for inappropriate purposes. We reserve the right to change the given information unilaterally without notice. If you have any queries or concerns about using this product, please contact us before application on +353 49 854 7209 technical@fleetwood.ie

Technical Data Sheet

Prestige Air-Purifying Scrubbable Matt
P 801

February 2025
Issue 2

FLEETWOOD
PAINTMAKERS OF IRELAND

Hand crafted in Ireland by Fleetwood Paints,
Virginia, Co. Cavan, A82 N267, Ireland.
☎ + 353 49 854 7209 🌐 fleetwood.ie ✉ info@fleetwood.ie
Follow us online for infinite inspiration

