


Fleetwood Paints Ltd

# Hospitality & Leisure

## CAWS M60

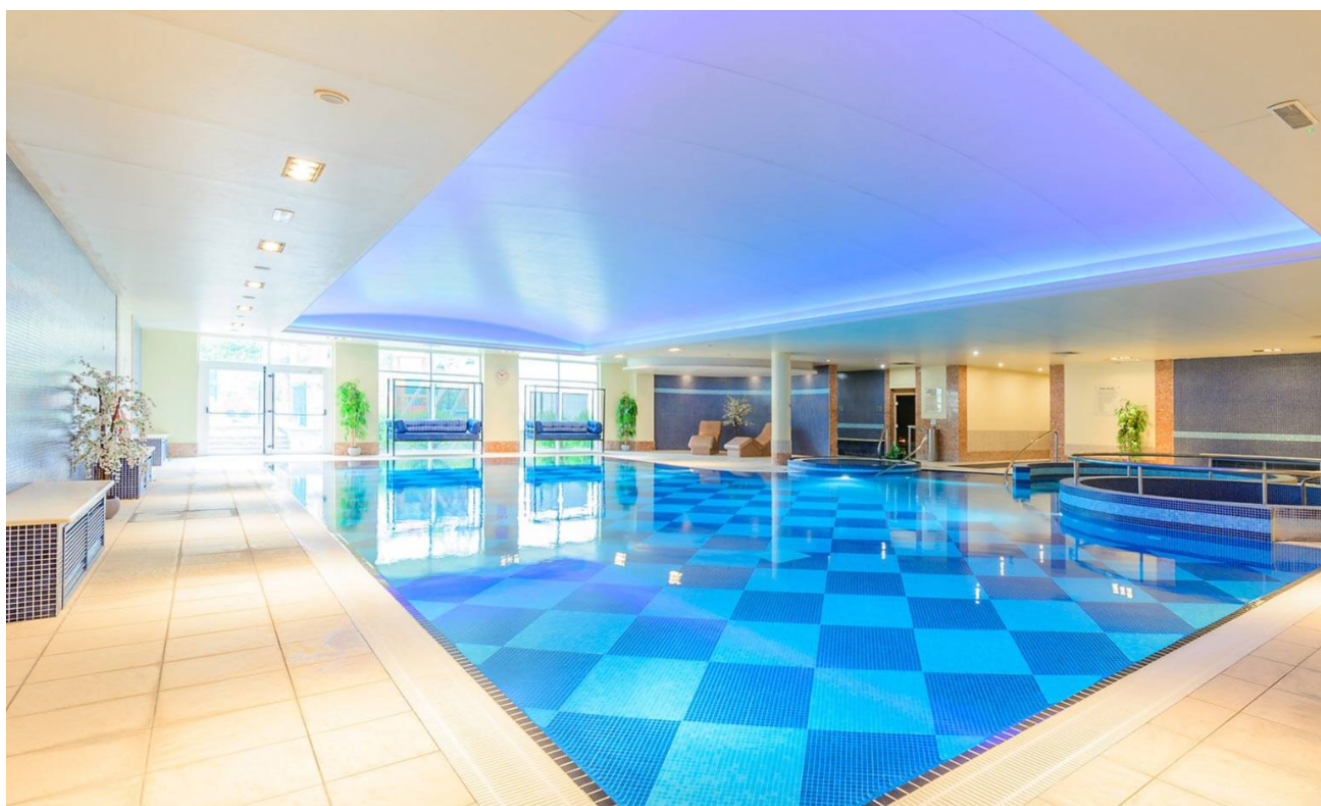

## Contents

M60 Painting/clear finishing .....	1
------------------------------------	---

## M60

### Painting/clear finishing

#### Coating systems

#### 110 Water-based finishing coats Bedroom Walls & Ceilings Type A

---

1. Description:
2. Manufacturer: [Fleetwood Paints Ltd](#)
  - 2.1. Contact details
    - 2.1.1. Address: Virginia  
Ballaghnea  
Cavan  
County Cavan  
Ireland  
Ireland  
A82 N267
    - 2.1.2. Telephone: +353 498547209
    - 2.1.3. Web: <https://www.fleetwood.ie>
    - 2.1.4. Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)
  - 2.2. Product reference: [Fleetwood Air + Eco Spec Vinyl Matt](#)
3. Composition: Pigment: Lightfast pigments. Binder: Acrylic modified copolymer emulsion. Solvent: Water.
4. Sheen: Flat matt.
5. Colour:
6. Coverage: Up to 15 m<sup>2</sup>/L.
7. Drying time: Touch dry in 30 minutes. Recoatable after 4 hours.
8. VOC Content (maximum): 5.0 g/L.
9. SurfaceSpreadOfFlame: To BS 476-7, Class 1.
10. Water vapour permeability: To ISO 7783:2018, V1 – Very high.
11. Surfaces: Internal Blockwork / Plasterboard / Plaster Concrete / Precast
  - 11.1. Preparation: Ensure surfaces are clean and dry
12. Initial coats: Fleetwood Air + Eco Vinyl Matt (Mist Coat)
13. Number of coats: 1
14. Finishing coats: Fleetwood Air + Eco Vinyl Matt (Full Coats)
  - 14.1. Number of coats: 2

#### 110 Water-based finishing coats -Corridor Ceilings Type B

---

1. Description:
2. Manufacturer: [Fleetwood Paints Ltd](#)
  - 2.1. Contact details
    - 2.1.1. Address: Virginia  
Ballaghnea  
Cavan  
County Cavan  
Ireland  
Ireland  
A82 N267
    - 2.1.2. Telephone: +353 498547209

- 2.1.3. Web: <https://www.fleetwood.ie>
- 2.1.4. Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)
- 2.2. Product reference: [Fleetwood Air + Eco Spec Vinyl Matt](#)
- 3. Composition: Pigment: Lightfast pigments. Binder: Acrylic modified copolymer emulsion. Solvent: Water.
- 4. Sheen: Flat matt.
- 5. Colour:
- 6. Coverage: Up to 15 m<sup>2</sup>/L.
- 7. Drying time: Touch dry in 30 minutes. Recoatable after 4 hours.
- 8. VOC Content (maximum): 5.0 g/L.
- 9. SurfaceSpreadOfFlame: To BS 476-7, Class 1.
- 10. Water vapour permeability: To ISO 7783:2018, V1 – Very high.
- 11. Surfaces: Internal Blockwork / Plasterboard / Plaster Concrete / Precast
  - 11.1. Preparation: Ensure surfaces are clean and dry
- 12. Initial coats: Fleetwood Air + Eco Vinyl Matt (Mist Coat)
- 13. Number of coats: 1
- 14. Finishing coats: Fleetwood Air + Eco Vinyl Matt (Full Coats)
  - 14.1. Number of coats: 2

## 110 Water-based finishing coats - Corridor Walls Type C

---

- 1. Description:
- 2. Manufacturer: [Fleetwood Paints Ltd](#)
  - 2.1. Contact details
    - 2.1.1. Address: Virginia  
Ballaghnea  
Cavan  
County Cavan  
Ireland  
Ireland  
A82 N267
    - 2.1.2. Telephone: [+353 498547209](tel:+353498547209)
    - 2.1.3. Web: <https://www.fleetwood.ie>
    - 2.1.4. Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)
  - 2.2. Product reference: [Fleetwood Air + Eco Spec Washable Matt](#)
- 3. Composition: Pigment: Lightfast pigments. Binder: Acrylic modified copolymer emulsion. Solvent: Water.
- 4. Sheen: Flat matt.
- 5. Colour:
- 6. Coverage: Up to 12 m<sup>2</sup>/L.
- 7. Drying time: Touch dry in 30 minutes. Recoatable after 4 hours.
- 8. VOC Content (maximum): 2.5 g/L.
- 9. SurfaceSpreadOfFlame: To BS 476-7, Class 1.
- 10. Water vapour permeability: To ISO 7783:2018, V1 – Very high.
- 11. Surfaces: Internal Blockwork / Plasterboard / Plaster Concrete / Precast
  - 11.1. Preparation: Ensure surfaces are clean and dry
- 12. Initial coats: Fleetwood Air + Eco Washable Matt (Mist Coat)

- 13. Number of coats: 1
- 14. Finishing coats: Fleetwood Air + Eco Washable Matt (Full Coats)
  - 14.1. Number of coats: 2

### **130 Waterborne undercoats - Doors - Hardwood / Softwood / Skirtings / Architraves / Railings Type A**

---

- 1. Manufacturer: [Fleetwood Paints Ltd](#)
  - 1.1. Contact details
    - 1.1.1. Address: Virginia  
Ballaghnea  
Cavan  
County Cavan  
Ireland  
Ireland  
A82 N267
    - 1.1.2. Telephone: [+353 498547209](tel:+353498547209)
    - 1.1.3. Web: <https://www.fleetwood.ie>
    - 1.1.4. Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)
  - 1.2. Product reference: [Fleetwood Air + Eco Spec High Opacity Undercoat](#)
- 2. Composition: Pigment: Lightfast pigments. Binder: Hybrid of acrylic and alkyd emulsions. Solvent: Water.
- 3. Colour:
- 4. Coverage: Up to 16 m<sup>2</sup>/L.
- 5. Drying time: Touch dry in 30 minutes. Recoatable after 2–4 hours.
- 6. VOC Content (maximum): 15 g/L.
- 7. Surfaces:

### **Doors - Hardwood / Softwood /Skirtings / Architraves / Railings**

- 7.1. Preparation: Ensure surfaces are clean and dry
- 8. Initial coats: Air + Eco Spec High Opacity Undercoat
  - 8.1. Number of coats: 1

### **130 Water-based finishing coats - Doors - Hardwood / Softwood /Skirtings / Architraves / Railings Type B**

---

- 1. Description:
- 2. Manufacturer: [Fleetwood Paints Ltd](#)
  - 2.1. Contact details
    - 2.1.1. Address: Virginia  
Ballaghnea  
Cavan  
County Cavan  
Ireland  
Ireland  
A82 N267
    - 2.1.2. Telephone: [+353 498547209](tel:+353498547209)
    - 2.1.3. Web: <https://www.fleetwood.ie>

2.1.4. Email: [info@fleetwood.ie](mailto:info@fleetwood.ie)

2.2. Product reference: [Fleetwood Air + Eco Spec High Opacity Satinwood](#)

3. Composition: Pigment: Lightfast pigments. Binder: Hybrid of acrylic and alkyd emulsions. Solvent: Water.
4. Sheen: Satin.
5. Colour: Other.
6. Coverage: Up to 16 m<sup>2</sup>/L.
7. Drying time: Touch dry in 30 minutes. Recoatable after 2–4 hours.
8. VOC Content (maximum): 30 g/L.
9. Surfaces:

## **Doors - Hardwood / Softwood /Skirtings / Architraves / Railings**

- 9.1. Preparation: Ensure surfaces are clean and dry
10. Initial coats:
11. Finishing coats: Air + Eco Spec High Opacity Satinwood
- 11.1. Number of coats: 2

### **Generally**

#### **215 Handling and storage**

---

1. Coating materials: Deliver in sealed containers, labelled clearly with brand name, type of material and manufacturer's batch number.
2. Materials from more than one batch: Store separately. Allocate to distinct parts or areas of the work.

#### **280 Protection**

---

1. 'Wet paint' signs and barriers: Provide where necessary to protect other operatives and general public, and to prevent damage to freshly applied coatings.

### **Preparation**

#### **400 Preparation generally**

---

1. Standard: In accordance with BS 6150.
2. Refer to any pre-existing CDM Health and Safety File.
3. Refer to CDM Construction Phase Plan where applicable.
4. Suspected existing hazardous materials: Prepare risk assessments and method statements covering operations, disposal of waste, containment and reoccupation, and obtain approval before commencing work.
5. Preparation materials: Types recommended by their manufacturers and the coating manufacturer for the situation and surfaces being prepared.
6. Substrates: Sufficiently dry in depth to suit coating.
7. Efflorescence salts: Remove.
8. Dirt, grease and oil: Remove. Give notice if contamination of surfaces/ substrates has occurred.
9. Surface irregularities: Remove.
10. Joints, cracks, holes and other depressions: Fill flush with surface, to provide smooth finish.
11. Dust, particles and residues from preparation: Remove and dispose of safely.

12. Water based stoppers and fillers
  - 12.1. Apply before priming unless recommended otherwise by manufacturer.
  - 12.2. If applied after priming: Patch prime.
13. Oil based stoppers and fillers: Apply after priming.
14. Doors, opening windows and other moving parts
  - 14.1. Ease, if necessary, before coating.
  - 14.2. Prime resulting bare areas.

## **420 Fixtures and fittings**

---

1. Removal: Before commencing work remove: .....
2. Replacement: Refurbish as necessary, refit when coating is dry.

## **481 Uncoated wood**

---

1. General: Provide smooth, even finish with arrises and moulding edges lightly rounded or eased.
2. Heads of fasteners: Countersink sufficient to hold stoppers/fillers.
3. Resinous areas and knots: Apply two coats of knotting.

## **580 Uncoated plaster**

---

1. Nibs, trowel marks and plaster splashes: Scrape off.
2. Overtrowelled 'polished' areas: Key lightly.

## **590 Uncoated plasterboard**

---

1. Depressions around fixings: Fill with stoppers/ fillers

## **Application**

### **711 Coating generally**

---

1. Application standard: In accordance with BS 6150, clause 9.
2. Conditions: Maintain suitable temperature, humidity and air quality during application and drying.
3. Surfaces: Clean and dry at time of application.
4. Thinning and intermixing of coatings: Not permitted unless recommended by manufacturer.
5. Overpainting: Do not paint over intumescent strips or silicone mastics.
6. Priming coats
  - 6.1. Thickness: To suit surface porosity.
  - 6.2. Application: As soon as possible on same day as preparation is completed.
7. Finish
  - 7.1. Even, smooth and of uniform colour.
  - 7.2. Free from brush marks, sags, runs and other defects.
  - 7.3. Cut in neatly.
8. Doors, opening windows and other moving parts: Ease before coating and between coats.

Ω End of Section